


drylin® R liners | Product range

Long, open design, precise for supported shafts –
made from iglidur® J (all-rounder)



Order key

Type	Size
J U M O-11-10	
igidur® J	d1
Liner	
Metric	
Open	
Precise	

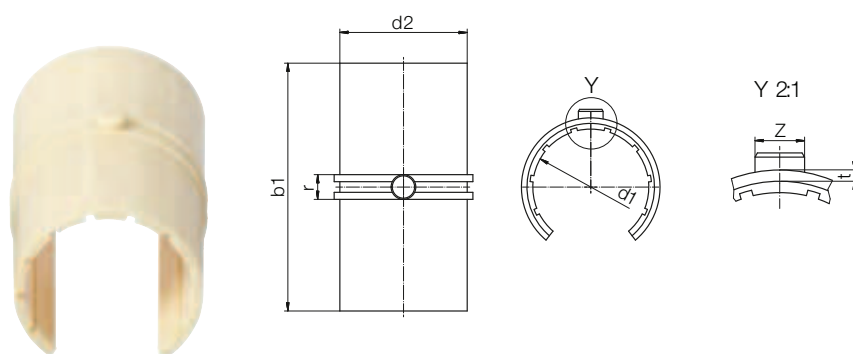

- Max. bearing clearance reduced by 50%
- Increased bearing area: longer service life



⁷⁸⁾ According to igus® testing method ► Page 1038

Please note: installation instructions ► Page 981



min. -50 °C


max. +90 °C

Dimensions [mm]

d1	d1-Tolerance ⁷⁸⁾	d2	b1	r	t	Z	Weight [g]	Part No.
10	+0.000 +0.040	12	28	3.0	0.8	2.5	1.10	JUMO-11-10
12	+0.000 +0.040	14	31	3.0	0.8	3.0	1.50	JUMO-11-12
16	+0.000 +0.040	18	35	3.5	0.8	3.5	2.20	JUMO-11-16
20	+0.000 +0.040	23	44	5.0	0.8	3.5	4.90	JUMO-11-20
25	+0.000 +0.040	28	57	5.0	0.8	4.0	8.23	JUMO-11-25
30	+0.000 +0.050	34	67	5.0	0.8	4.0	14.95	JUMO-11-30
40	+0.000 +0.050	44	79	6.0	1.3	5.0	23.16	JUMO-11-40
50	+0.000 +0.060	55	99	7.0	1.3	6.0	45.35	JUMO-11-50

Housing bore for liner JUMO-11 | dimensions [mm]

Shaft Ø	d1 H7	B h10	W +0.2	r +0.05	t +0.1	f +0.5	Z +0.2	Part No.
10	12	29	7.3	3.0	1.0	1.0	2.6	JUMO-11-10
12	14	32	9.0	3.0	1.0	1.5	3.1	JUMO-11-12
16	18	36	11.6	3.5	1.0	1.7	3.6	JUMO-11-16
20	23	45	12.0	5.0	1.0	2.0	3.6	JUMO-11-20
25	28	58	14.5	5.0	1.0	2.0	4.1	JUMO-11-25
30	34	68	16.6	5.0	1.0	2.0	4.1	JUMO-11-30
40	44	80	21.0	6.0	1.5	2.5	5.1	JUMO-11-40
50	55	100	25.5	7.0	1.5	2.5	6.1	JUMO-11-50

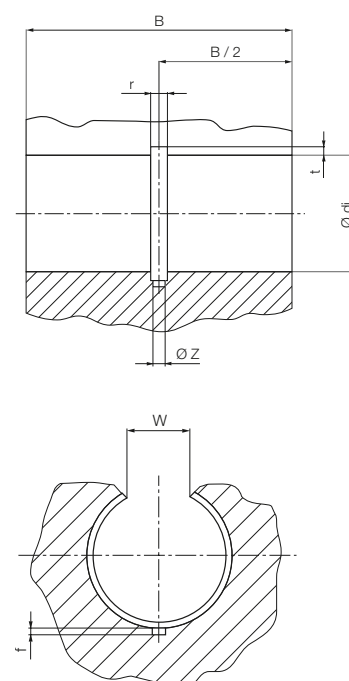

Can be combined with:



OJUM-01/-03



OJUM-06/-06-LL