



Order key

complete system ► Page 914



Type

Size

WW-06-30-06

Guide carriage


Shafts-Ø [mm]

Profile width

Carriage length

All parts can be ordered individually
or as an assembled system

► Page 914

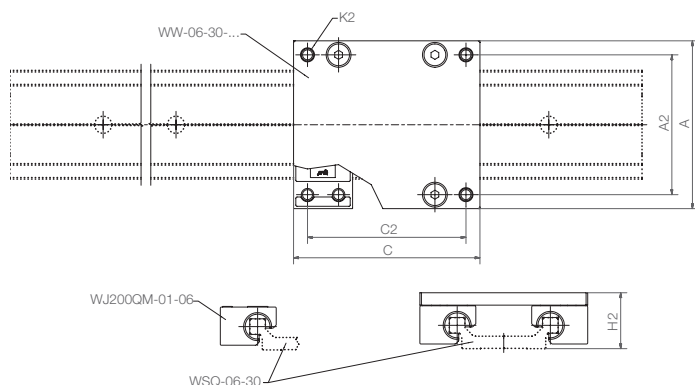

Technical data and dimensions [mm]

Part No. ⁵⁴⁾	Weight [kg]	A		A2	C2	K2	H2 ⁵⁷⁾ ±0.25	Static load capacity				
		Width	Length					Coy [N]	Coz [N]	Mox [Nm]	Moy [Nm]	Moz [Nm]
WW-06-30-06	0.10	54	60	45	51	M4	18	1,680	840	25	34	34
WW-06-30-08	0.11	54	80	45	71	M4	18	1,680	840	25	51	51
WW-06-30-10	0.12	54	100	45	91	M4	18	1,680	840	25	68	68
WW-06-60-06	0.13	85	60	76	51	M4	18	1,680	840	50	34	34
WW-06-60-08	0.15	85	80	76	71	M4	18	1,680	840	50	51	51
WW-06-60-10	0.17	85	100	76	91	M4	18	1,680	840	50	68	68

⁵⁷⁾ Height dimension minus the bearing clearance tolerance⁵⁴⁾ Optionally available with hand clamp suffix "-HKA"

Order example:

WW-06-30-06: fitted guide carriage

WWC-06-30-06: Mono-Slide guide carriage

Can be combined with:



WSQ-...



WSXQ-...

Suitable liner materials:



iglidur® J200